


Folding and Gluing Machine ZH-1200



Characteristics

Four fold with the hooking bottom function: giving paper department is operated by a single board and regulated quickly and simply. Distances between papers are adjusted by the import segment less adjustor and vibrant engine is set to make the sending department more stable. It adopts Japan Toshiba step less transducer to adjust the speed and make it run more stable. In ready-folding department, the first fold and the third fold can be exchanged by 180 Or 90 And the second fold and the fourth fold model.


The hook-bottom department is composed of multifunction. It adopts the abroad advanced technologies to make it high speed running and it is suitable for modeling of the hook-bottom boxes with different specifications; the modeling pressing department adopts Taiwan advanced technologies and is designed by distinctive components to make the hook-bottom boxes press even and beautiful; Install the colored touching screen in terms of the requirements of customers. (man-machine interface)

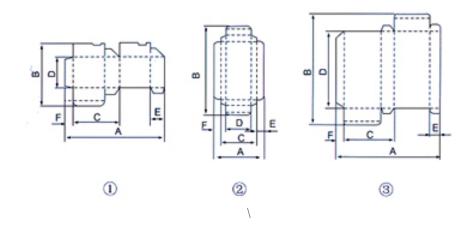

Model	Max Speed (m/min)	Power	Dimension (L x W x H)	Net Weight
ZH 1200	220	9 KW	11.8 x 1.5 x 16 Mtr	4.8 T

Moonlight Traders Hk Limited

基本平面图 FLOOR PLAN

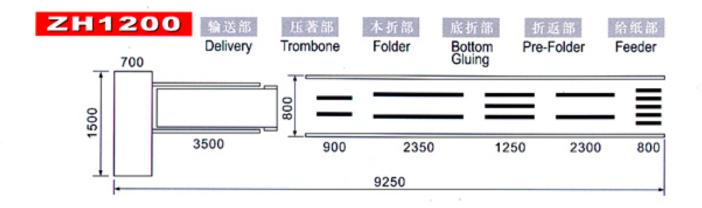

Model		ZH-880型			ZH-1000型			ZH-1200型		
FA 1	TTERN	1	(2)	(3)	1	(2)	(3)	1	(2)	3
Α	MAX	550	430	580	650	550	750	800	650	900
	MIN	115	80	70	150	170	180	230	200	230
В	MAX	420	400	500	550	560	600	675	670	700
	MIN	80	70	60	150	90	115	200	200	210
С	MAX	250	320	280	300	450	380	380	600	500
	MIN	60	65	40	80	85	50	90	70	85
D	MAX	400	250	430	550	300	515	600	600	655
	MIN	120	60	80	130	260	155	160	185	160
Е	MAX	155	160	175	170	60	200	200	180	250
	MIN	40	15	10	50	20	20	60	25	30
F	MAX	60	50	20	110	60	25	135	70	25
	MIN	11	15	9	22	20	10	25	20	10

★本目录仅供参考,特殊型式可另行设计

This catalog is for general reference only, special design is available.